






LEDパワフルスクエアライト	品名	LEDパワフルスクエアライト
	型番	LED-W-40/40C
	光源	高輝度白色LED40球
	配光の種類	対称配光

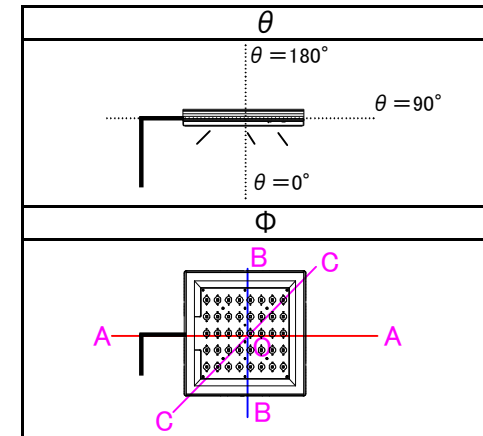

組合せ電源装置		
品番：HLG-320H-42A		
配光角	1/2ビーム角	40度
	1/10ビーム角	80度

一次側消費電力について	
電源装置AC100V入力時 220.4W/222.3VA	電源装置AC200V入力時 215.9W/221.2VA

照明器具製品仕様	
電源電圧	DC31.4V
電流	6.4A
消費電力	201W
照度	(中心) 29,490Lx/1m
器具光束	20,010Lm
光源光束	23,500Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力)(AC200V時)	93.1Lm/W
色温度	5,000K +300K -700K
演色性	75

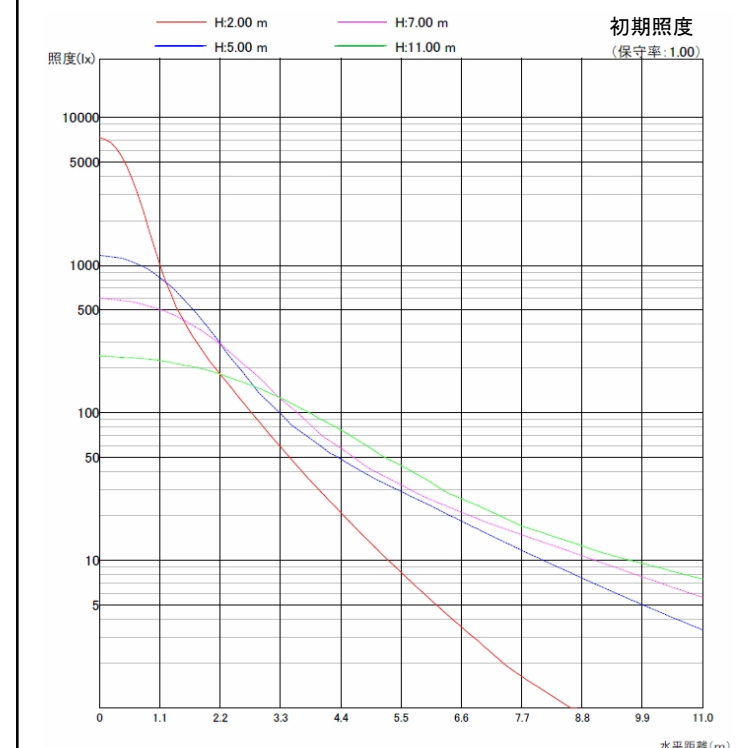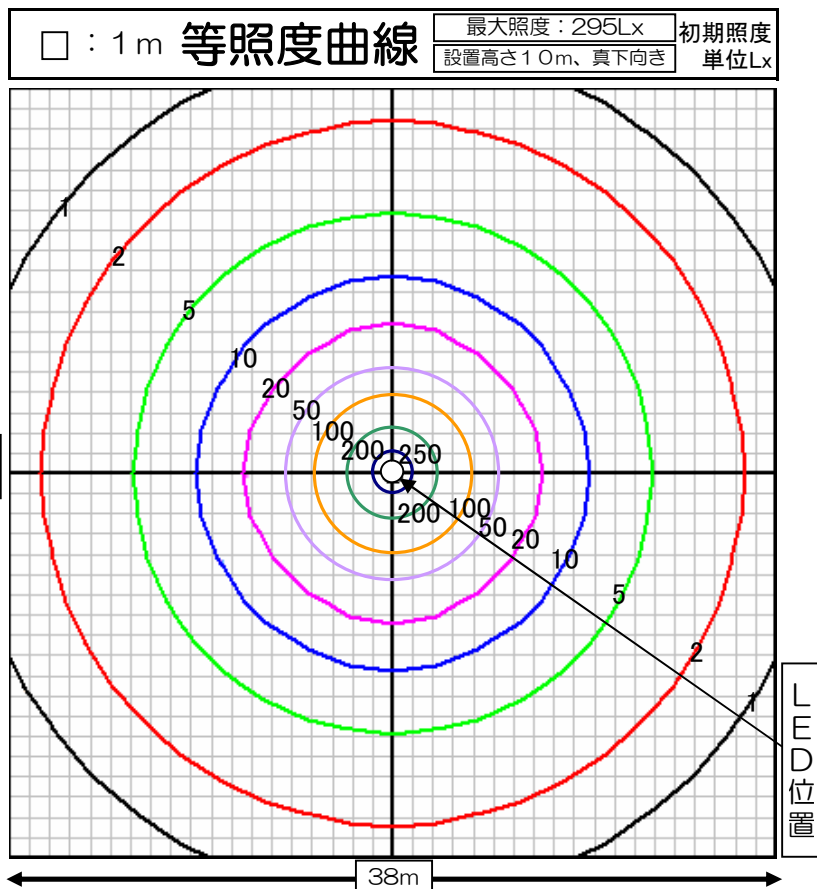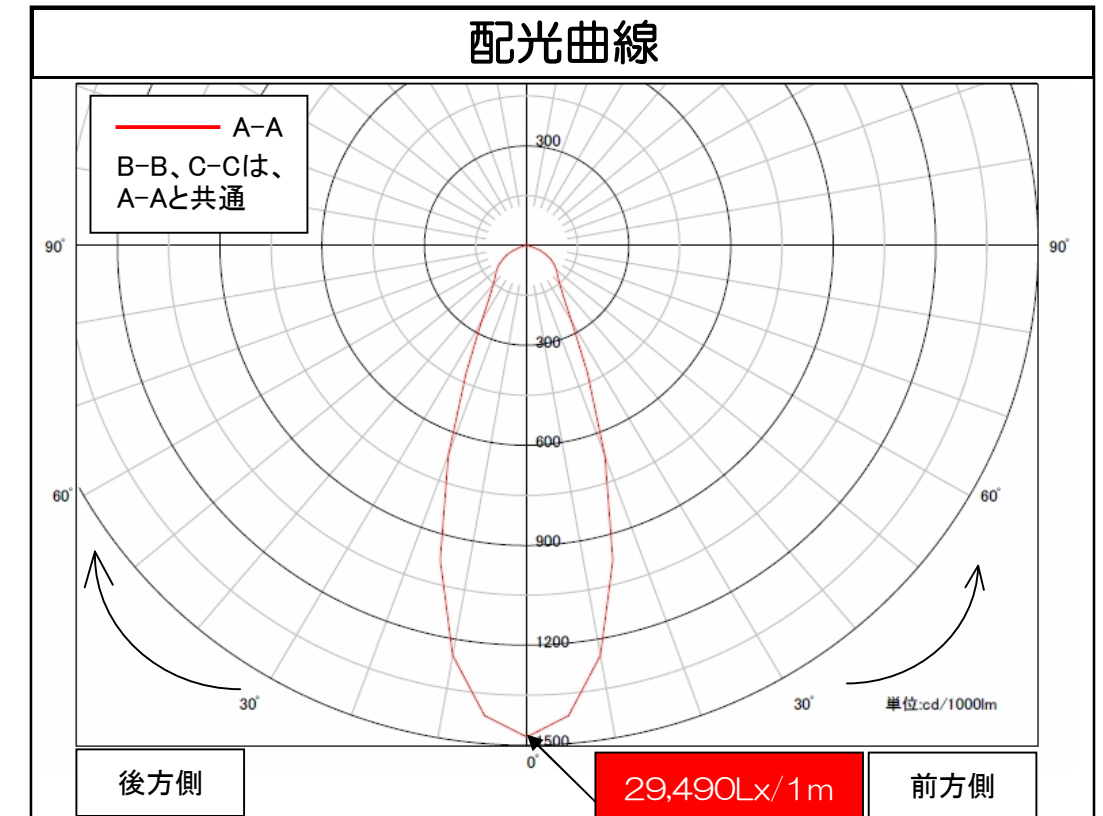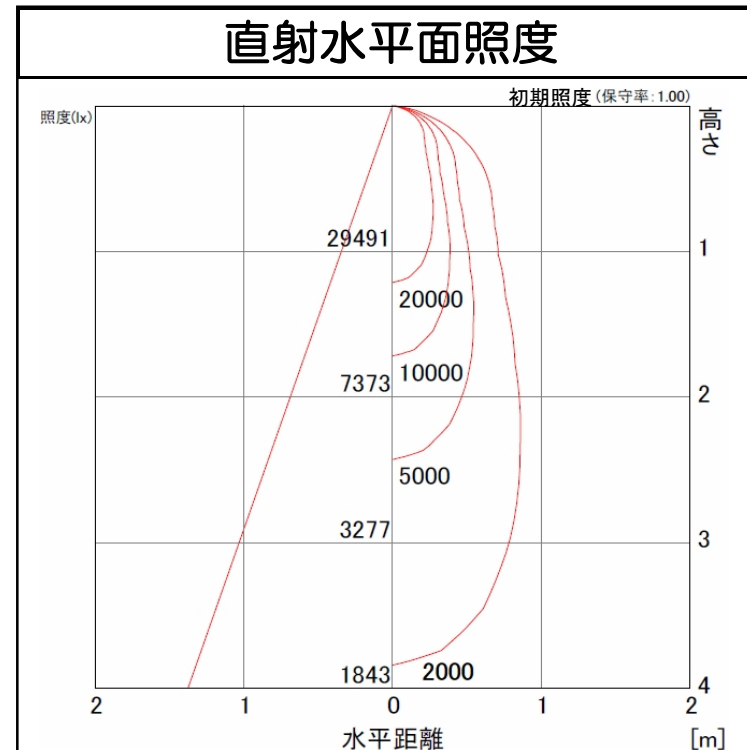

照明率表

作業面照明率(×0.01)

天井	壁	床	室指数												
			0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	56	73	84	92	99	103	110	114	117	120	123	125	127
		10	52	68	77	82	88	91	95	98	100	102	104	105	107
	50	30	44	61	72	80	88	93	101	106	110	115	118	122	125
		10	42	58	68	74	80	84	90	94	96	99	102	104	106
70	30	30	37	53	64	72	80	85	94	100	104	110	114	119	123
		10	36	52	61	68	75	79	86	90	93	97	99	102	105
	10	30	32	47	57	64	71	75	82	87	90	94	97	101	104
		10	30	44	56	66	74	80	84	89	93	95	98	100	103
50	30	30	36	52	62	70	77	82	89	94	97	102	105	109	112
		10	36	51	60	67	73	78	84	88	91	94	97	100	102
	10	30	32	47	57	63	70	74	81	85	88	92	95	98	101
		10	30	42	52	62	70	77	82	89	94	97	100	103	106
30	30	30	36	51	61	68	75	79	84	89	93	97	100	103	106
		10	36	51	60	66	73	77	83	87	89	93	95	98	100
	10	30	32	47	56	63	69	74	80	84	87	91	94	97	99
		10	31	45	55	61	67	72	78	82	85	89	91	94	96

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります