






	品名	LEDワイドスクエアライト
	型番	LED-12A
	光源	高輝度白色LED12球
	配光の種類	対称配光

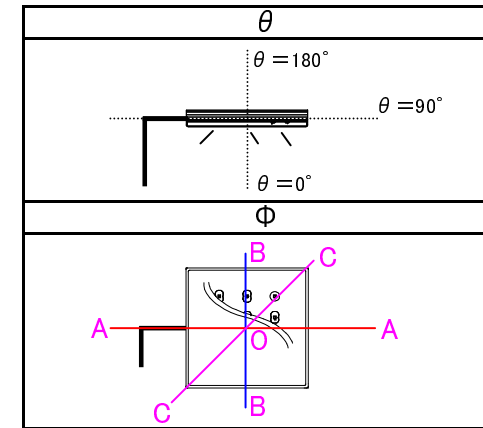

組合せ電源装置	
品番 : HLG-60H-20A	
配光角	水平60度、垂直60度

一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
29.3W/29.7VA	29.3W/30.7VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	2.1A
消費電力	25.6W
照度	(中心) 4,061Lx/1m
器具光束	3,025Lm
光源光束	3,451Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	103.2Lm/W
色温度	5,000K +200K -500K
演色性	70~73

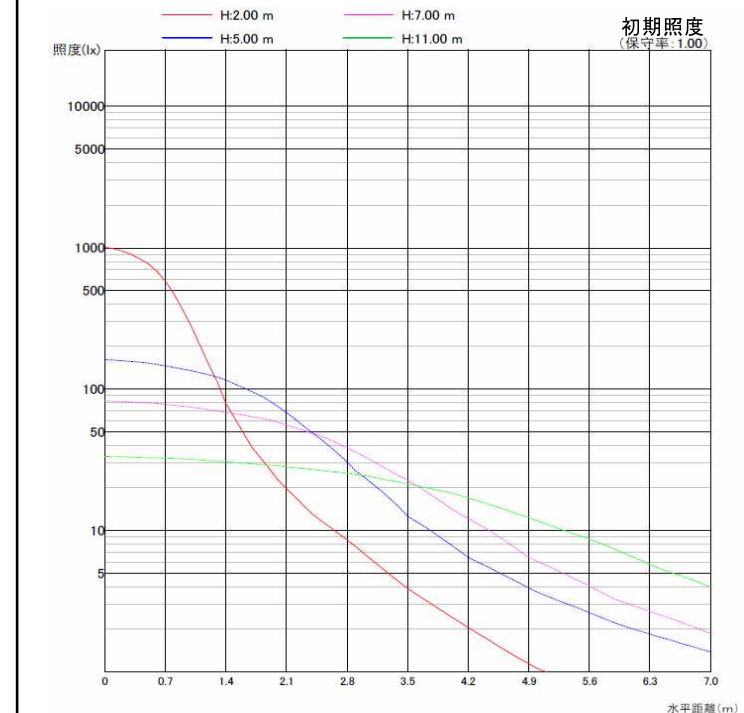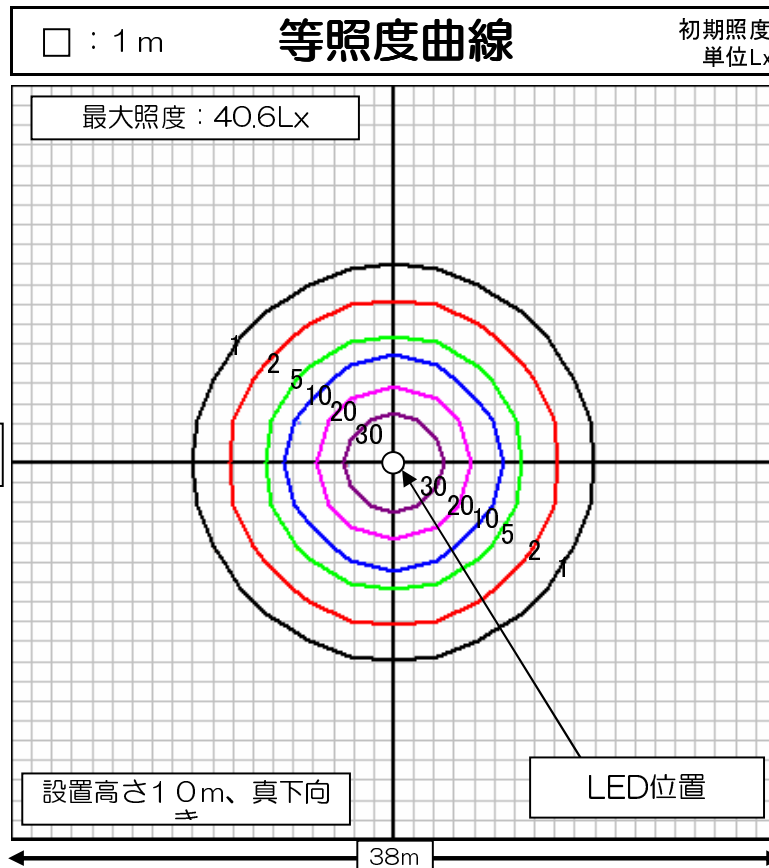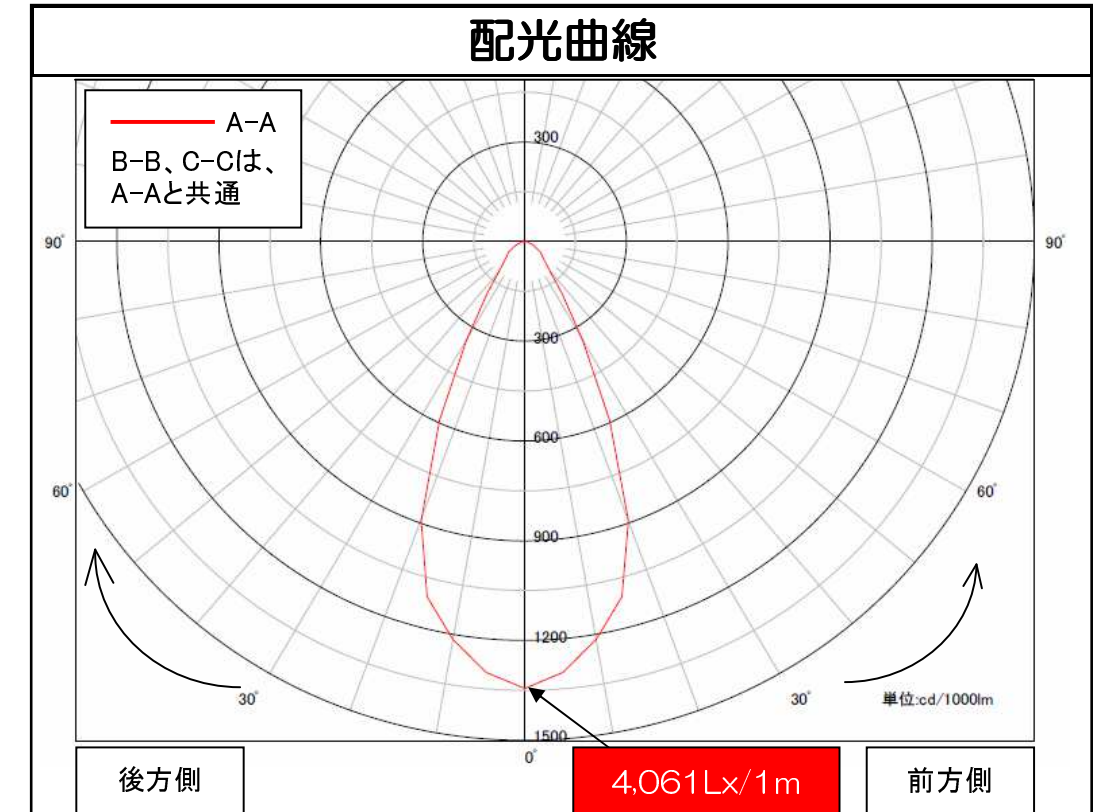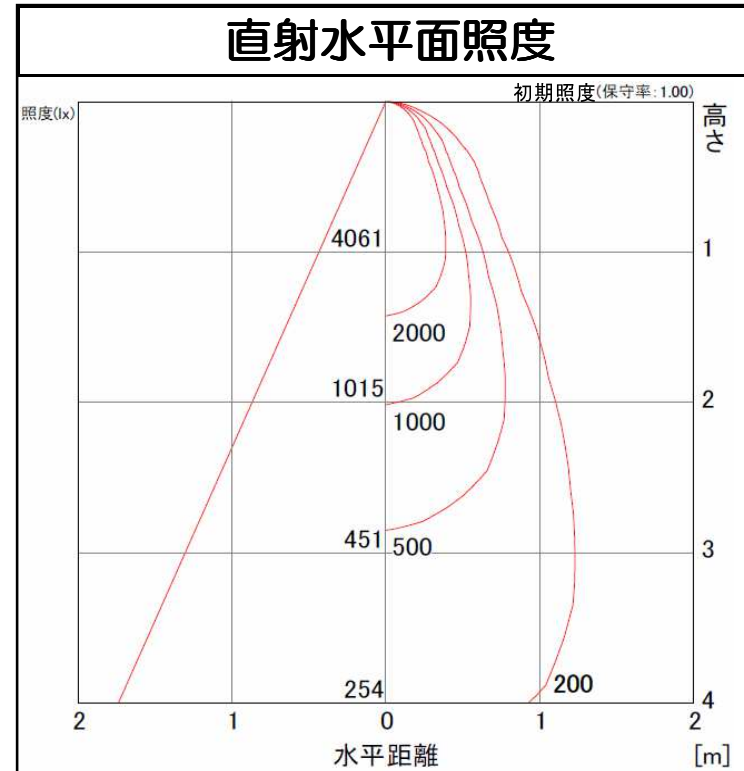

照明率表

反射率(%)	作業面照明率(×0.01)														
	室指数														
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	60	78	89	96	102	106	112	116	118	121	124	126	128
		10	56	72	81	86	91	94	97	100	101	103	105	106	107
	50	30	49	67	77	85	92	97	104	108	112	116	120	123	126
		10	47	63	73	79	84	88	93	96	98	101	103	105	106
70	30	30	42	60	70	77	85	90	97	103	107	112	116	120	124
		10	41	58	67	74	80	83	89	93	95	99	101	104	106
	10	30	38	54	63	70	76	80	86	90	93	97	99	102	105
		10	38	54	63	70	76	80	86	90	93	97	99	102	105
50	70	30	48	66	76	84	90	95	101	106	109	113	116	119	122
		10	47	63	72	78	84	87	92	95	97	100	102	104	105
	30	30	42	59	70	77	84	89	96	101	104	109	113	117	120
		10	41	58	67	73	79	83	88	92	94	98	100	103	105
30	10	30	38	54	63	69	76	80	85	89	92	96	98	101	104
		10	38	54	63	69	76	80	85	89	92	96	98	101	104
	50	30	47	64	74	81	87	91	97	101	103	107	109	112	114
		10	46	62	71	77	82	86	90	93	95	98	100	102	103
10	30	30	42	58	68	75	82	86	92	97	100	104	107	110	113
		10	41	57	66	73	78	82	87	91	93	96	98	101	103
	10	30	38	54	63	69	75	79	84	88	91	95	97	100	102
		10	38	54	63	69	75	79	84	88	91	95	97	100	102
0	30	30	41	58	67	74	80	84	89	93	96	99	102	104	107
		10	41	57	66	72	77	81	86	89	92	95	97	99	101
	10	30	38	53	63	69	75	78	84	87	90	93	96	98	100
		10	36	52	61	67	73	77	82	85	88	91	93	96	98

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります