

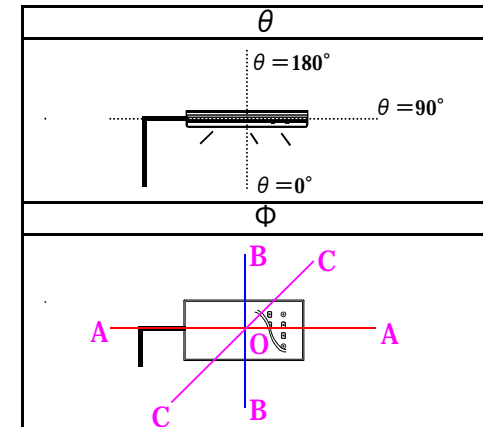
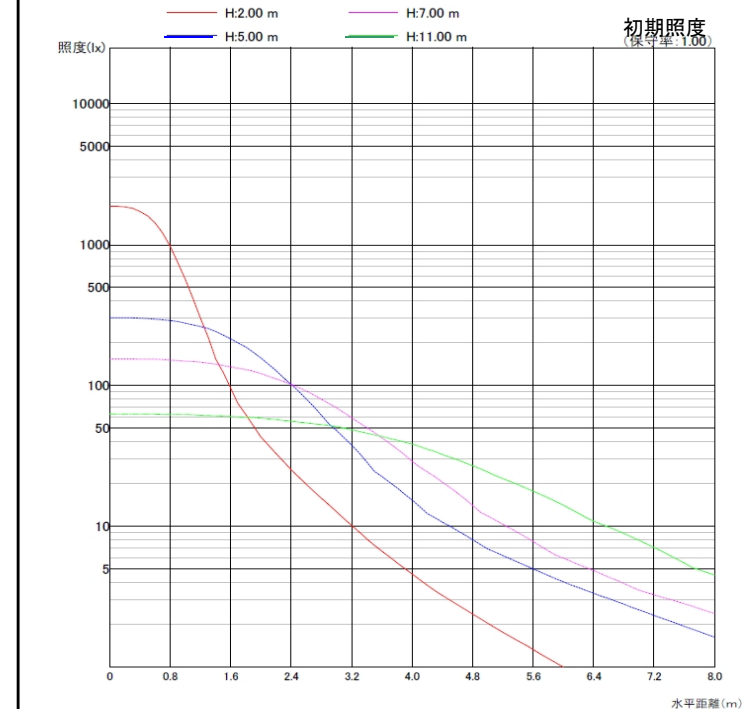


LEDワイドレクタングルライト	品名	LEDワイドレクタングルライト
	型番	<b>LED-24BA</b>
アクリルカバー（製品形状は代表的な写真です）	光源	高輝度白色LED24球
	配光の種類	対称配光

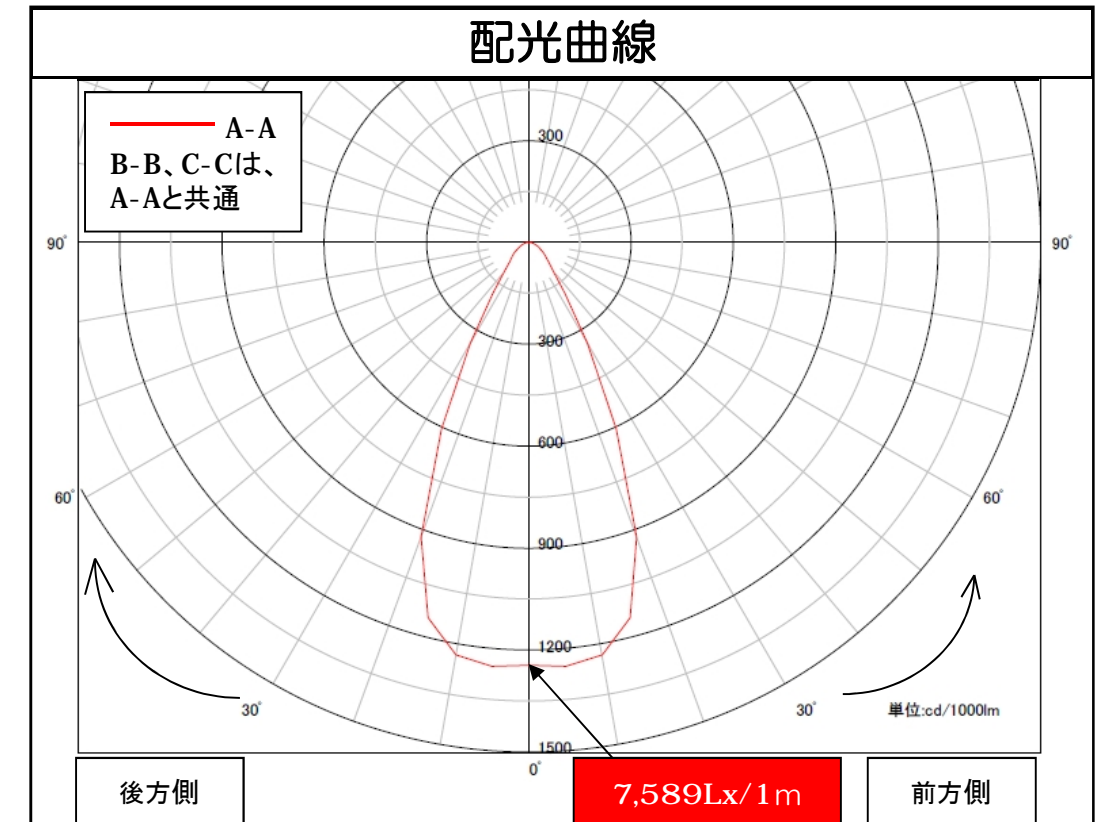

組合せ電源装置	
品番：HLG-100H-20A	
配光角	水平60度、垂直60度
一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
57.9W/58.6VA	57.5W/60.7VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	4.2A
消費電力	51.2W
照度	(中心) 7.589Lx/1m
器具光束	6,105Lm
光源光束	6,903Lm
固有エネルギー消費効率 <small>(器具光束÷一次側入力電力) (AC200V時)</small>	106.2Lm/W
色温度	5,000K $\pm$ 200K -500K
演色性	70~73

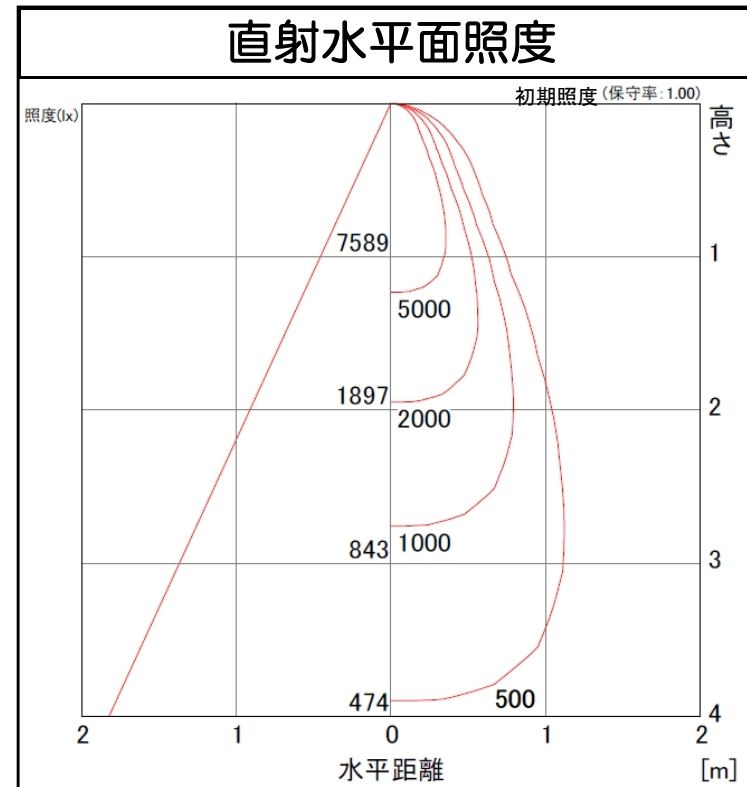

### 照明率表

作業面照明率 (×0.01)

天井	壁	床	室指数															
			0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0			
80	70	30	60	79	89	96	102	106	112	116	118	122	124	126	128			
		10	57	72	81	86	91	94	97	100	101	103	105	106	107			
	50	30	49	67	78	85	92	97	104	109	112	117	120	123	126			
		10	47	64	73	79	85	88	93	96	98	101	103	105	106			
70	30	30	43	60	71	78	85	90	98	103	107	112	116	121	124			
		10	42	58	68	74	80	84	89	93	95	99	101	104	106			
	10	10	38	54	64	70	76	80	86	90	93	97	99	102	105			
		30	59	77	87	94	100	103	109	112	114	118	120	122	124			
50	10	10	56	71	80	85	90	93	96	99	100	102	104	105	106			
		50	30	49	66	77	84	91	95	102	106	109	113	116	119	122		
	10	10	47	63	73	78	84	87	92	95	97	100	102	104	105			
		30	43	60	70	77	84	89	96	101	104	109	113	117	120			
30	10	10	42	58	67	74	79	83	88	92	95	98	100	103	105			
		10	38	54	64	70	76	80	86	89	92	96	99	102	104			
	50	30	48	65	75	81	88	92	97	101	104	107	109	112	114			
		10	46	62	71	77	83	86	90	93	95	98	100	102	103			
10	30	30	42	59	69	76	82	86	93	97	100	104	107	110	113			
		10	41	58	67	73	79	82	87	91	93	96	98	101	103			
	10	10	38	54	63	70	76	79	85	88	91	95	97	100	102			
		30	42	58	68	74	80	84	89	93	96	99	102	105	107			
0	10	10	41	57	66	72	78	81	86	89	92	95	97	99	101			
		10	38	54	63	69	75	79	84	87	90	93	96	98	100			
	0	0	37	53	62	68	73	77	82	85	88	91	93	96	98			

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります