


品名	LEDワイドジャンボスクエアライト
型番	LED-W-48-WBA
光源	高輝度白色LED48球
配光の種類	非対称配光



組合せ電源装置

品番: HPS-170W17V10A

一次側消費電力について 電源装置AC100V入力時 電源装置AC200V入力時


110.7W/111.9VA


配光角


110.5W/116.8VA

水平140度、垂直85度

照明器具製品仕様								
電源電圧	DC12.18V							
電流	8.4A							
消費電力	102.3W							
照度	(中心) 3,182Lx/1m (130度)7,748Lx/1m							
器具光束	11,454Lm							
光源光束	13,607Lm							
固有エネルギー消費効率 (器具光束÷一次側入力電力)(AC200V時)	103.7Lm/W							
色温度	$5,000K^{+200K}_{-500K}$							
演色性	70~73							

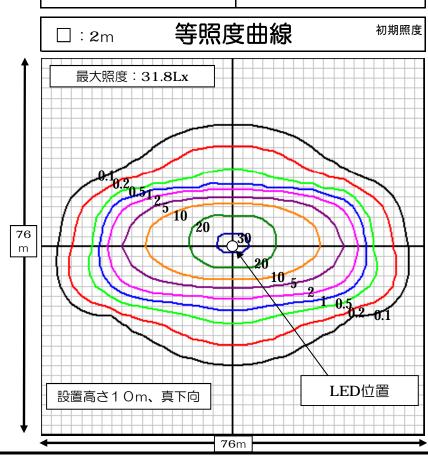

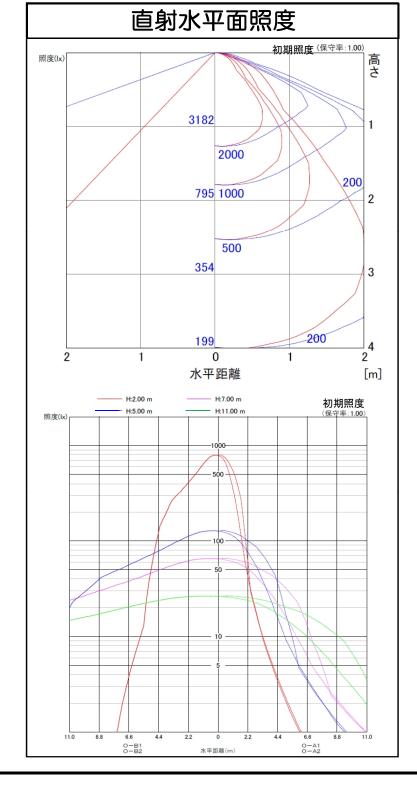

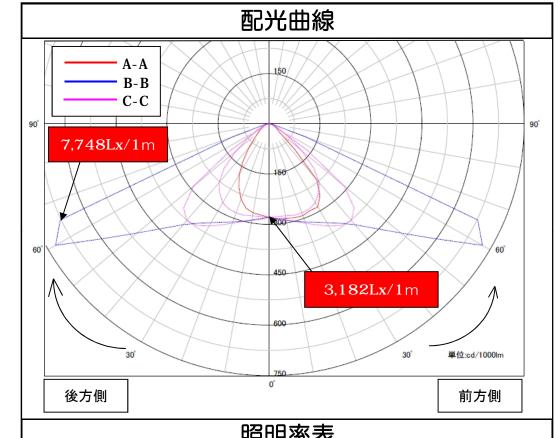

						作業	面照明率	率(×0	. 01)						
反.	射率(9	6)							室指数						
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	61	73	82	91	97	105	110	114	118	121	124	126
		10	41	56	66	74	81	85	91	95	97	100	102	104	106
	50	30	30	46	58	68	78	84	94	101	106	111	115	120	123
		10	29	44	54	63	71	77	84	89	92	97	99	102	104
	30	30	22	37	48	58	68	75	86	94	99	106	110	116	120
		10	22	36	46	55	64	70	78	84	88	93	96	100	102
	10	10	17	31	40	49	59	64	73	80	84	90	93	98	101
70	70	30	43	59	71	80	88	93	101	106	110	114	116	119	122
		10	40	55	65	72	79	84	90	94	96	99	101	103	104
	50	30	29	46	57	66	76	82	92	98	102	108	112	116	119
		10	29	44	54	62	70	76	83	88	91	95	98	101	103
Ī	30	30	22	37	48	57	67	74	84	91	96	103	107	112	117
		10	22	36	46	55	64	69	78	84	87	92	95	99	101
Ī	10	10	17	31	40	49	58	64	73	80	84	89	93	97	100
	50	30	29	44	55	64	73	79	87	93	97	102	105	109	111
		10	28	42	52	60	69	74	81	86	89	93	96	99	101
50	30	30	22	36	47	56	65	71	81	88	92	98	102	106	109
		10	21	35	45	54	63	68	76	82	86	90	93	97	99
1	10	10	17	31	40	49	58	63	72	79	83	88	91	95	98
	30	30	21	36	45	54	64	69	78	84	88	93	96	100	103
30		10	21	35	44	53	62	67	75	81	84	89	92	95	97
Ī	10	10	17	30	40	48	57	63	72	78	81	87	90	94	96
0	0	0	15	28	38	46	55	61	69	75	79	84	87	91	94

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります